


TECHNICAL DATA SHEET AKE CONTAINER
SOLID DOOR STANDARD CONFIGURATION

- 1. ULD type (IATA code) : AKE - GOH
- 2. Description : Lower deck air cargo container
- 3. Usage : General cargo and baggage
- 4. Contour / front view :



- 5. Dimensions : Base = 60,4" x 61,5" (1534 x 1562 mm)
Height = 63,9" (1623 mm)
- 6. Tare weight : Approx. 105 kg / 232 lb
- 7. Maximum Gross Weight : 1588 kg / 3500 lb
- 8. Sheet alloy / thickness : Panels and roof 6082-T6 / 0.7 mm
Door 6082-T6 / 0.9 mm
Slope 6082-T6 / 1.2 mm
Base 7021-T6 / 3.0 mm
- 9. Extrusion alloy : Base 7003-T6
Structure 7003-T6
- 10. Fasteners : Lockbolts (6.4 mm)
- 11. Stiffeners : 2 in slope panel
2 in aft panel
4 (GOH bars) in roof panel
- 12. Door : Reinforced door posts
Reinforced front header
Bi-fold hinged aluminium door
- 13. Gussets : In each corner
- 14. Others : Grasp handles on each corner
Document holder
Manufacturing plate
Tie down points attached along side base edge rails
- 15. GOH system : 4 GOH bars from front to aft, max. 275 kg per bar.
Reinforced front roof extrusion
- 15. Flammability : FAR 25.853
- 16. Certification standard : TSO C90c / NAS3610-2K2C
- 17. Certified by : EASA / FAA
- 18. Driessen p/n : **3-D218G**

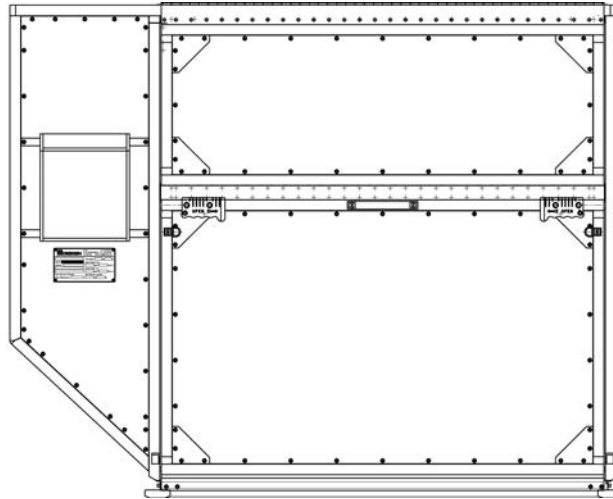