


Pallet Net Fixing PMC / PAG Pallet

Select one of the 125" sides of the PMC or PAG pallet. The spacing of the five (5) double studs should be as follows:

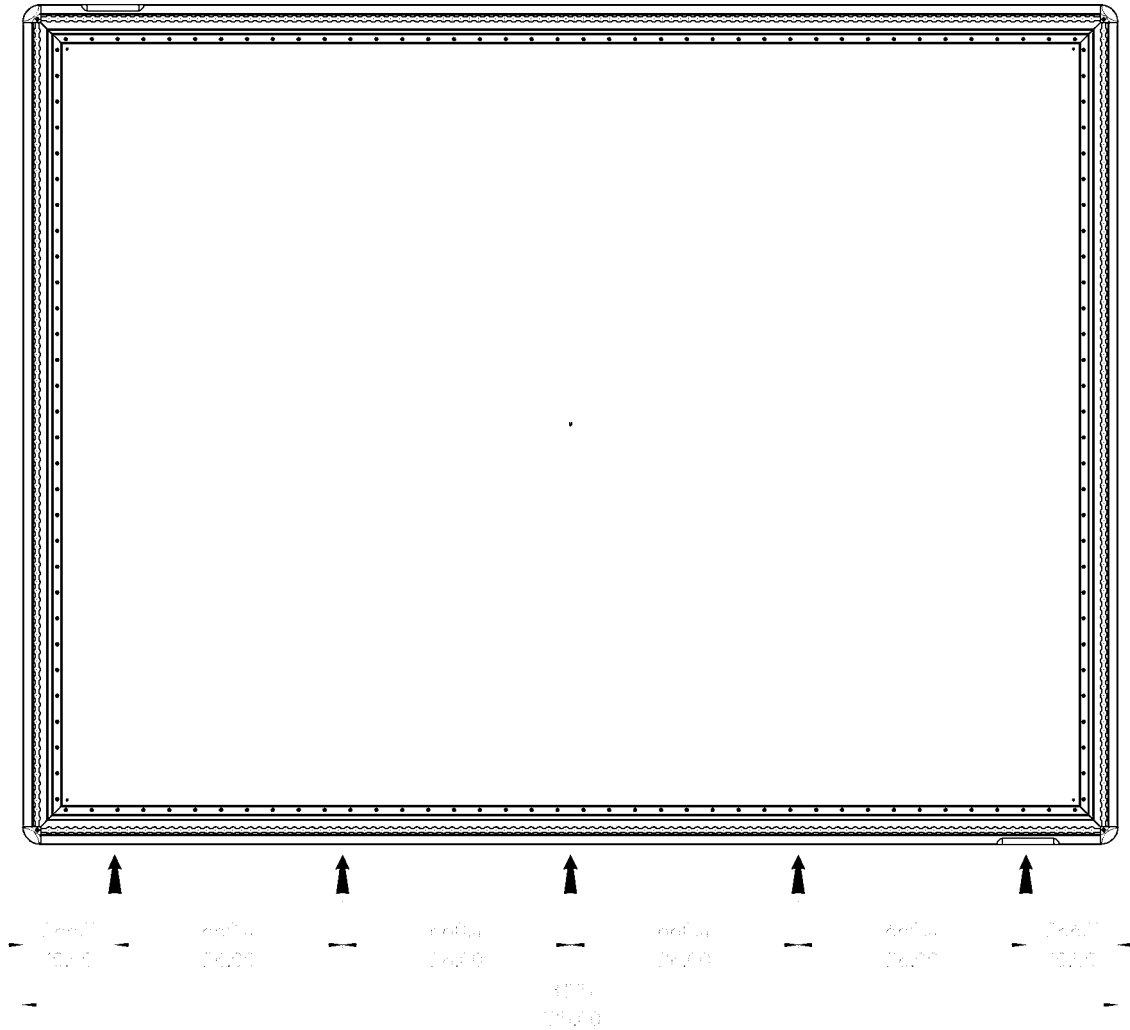

Dimensioned positions indicate eye of double stud.

www.driessen.com

Air Cargo Equipment • Trolleys • Galley Structures
Galley Equipment • First Class Monuments • Crewrests



DRIESSE

Driesse Europe
De Stek 1,
PO Box 28
1770 AA Wieringerwerf
The Netherlands
Phone +31 227 606 161
Fax +31 227 606 120
Email europe@driessen.com

Driesse USA
3340 C Greens Rd.
Suite 300
Houston, TX 77032
USA
Phone +1 281 590 0300
Fax +1 281 590 0308
Email houston@driessen.com

Driesse Asia Pacific
Asia Pacific Region Sales Office
4 Loyang Crescent
Singapore 508979
Singapore
Phone +65 65 465 486
Fax +65 65 465 487
Email singapore@driessen.com

Pallet Net Fixing PMC / PAG Pallet

Place all five double studs accordingly inside the seat track of the 125" edge rail that you selected.



Take a PIN TENSION 3*20 (P/N 9-050-40) and place it inside the hole of the double studs.



Tap the PIN TENSION completely into the hole using a small hammer



The double studs are now permanently fixed on the pallet.

www.driessen.com

Air Cargo Equipment • Trolleys • Galley Structures
Galley Equipment • First Class Monuments • Crewrests



DRIESSEN

Driessen Europe
De Stek 1,
PO Box 28
1770 AA Wieringerwerf
The Netherlands
Phone +31 227 606 161
Fax +31 227 606 120
Email europe@driessen.com

Driessen USA
3340 C Greens Rd.
Suite 300
Houston, TX 77032
USA
Phone +1 281 590 0300
Fax +1 281 590 0308
Email houston@driessen.com

Driessen Asia Pacific
Asia Pacific Region Sales Office
4 Loyang Crescent
Singapore 508979
Singapore
Phone +65 65 465 486
Fax +65 65 465 487
Email singapore@driessen.com