



## DQP Containers Non-forkliftable base/Forkliftable base

The container is a non-welded unit with individual, exchangeable parts, facilitating quick, easy and cost efficient exchange of damaged extrusions and sheets.

### General specifications


Design	According to AS 1677 (general requirements for non-certified ULDs, B 767)	
MGW	5400 lb/2449 kg	
Max. dimensions	96x60.4x64 in.	
Internal volume	191 ft <sup>3</sup> / 5.4 m <sup>3</sup> (non-forkliftable)	177 ft <sup>3</sup> / 6.6 m <sup>3</sup> (forkliftable)



**Fabric door options:**

- Forkliftable base/non-forkliftable base
- Additional stiffeners
- Spring actuated, self-roll-up fabric door
- Various colours of fabric door
- GOH (Garment on Hangers) transport provision
- Polycarbonate sheets

Part Number	Door Configuration (door width 58.7x60.5 in. / 1491x1536 mm)	Tare Weight (typical)
4-B-112	1 fabric door 1-bar	235 lb/107 kg
4-B-212	1 fabric door 2-bar	238 lb/108 kg
4-B-312	1 fabric door 3-bar	240 lb/109 kg

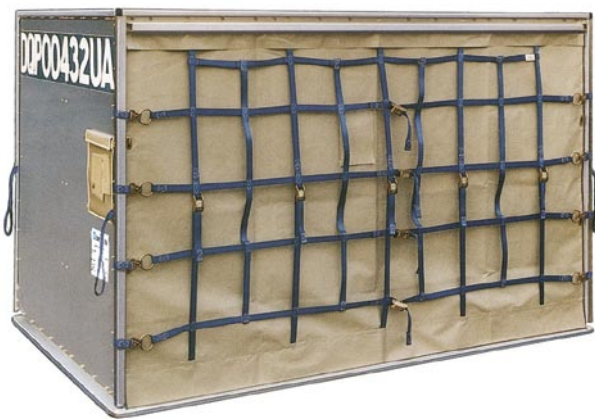

**Barless door options:**

- Forkliftable base/non-forkliftable base
- Additional stiffeners
- Various colours of fabric door
- GOH (Garment on Hangers) transport provision
- Polycarbonate sheets

Part Number	Door Configuration	Tare Weight (typical)
4-B-N12	1 fabric curtain & net	235 lb/107 kg
4-B-V12	1 fabric curtain & straps	235 lb/107 kg

[www.driessen.com](http://www.driessen.com)

Air Cargo Equipment • Trolleys • Galley Structures  
Galley Equipment • First Class Monuments • Crewrests



**Driessen Europe**  
De Stek 1,  
PO Box 28  
1770 AA Wieringerwerf  
The Netherlands  
Phone +31 227 606 161  
Fax +31 227 606 120  
Email europe@driessen.com

**Driessen USA**  
3340 C. Greens Rd.  
Suite 300  
Houston, TX 77032  
USA  
Phone +1 281 590 0300  
Fax +1 281 590 0308  
Email houston@driessen.com

**Driessen Asia Pacific**  
Asia Pacific Region Sales Office  
4 Loyang Crescent  
Singapore 508979  
Singapore  
Phone +65 65 465 486  
Fax +65 65 465 487  
Email singapore@driessen.com