


TECHNICAL DATA SHEET COLLAPSIBLE AKE CONTAINER
BARLESS DOOR STANDARD CONFIGURATION

- 1. ULD type (IATA code) : AKE
- 2. Description : Lower deck air cargo container
- 3. Usage : General cargo and baggage
- 4. Contour / front view :

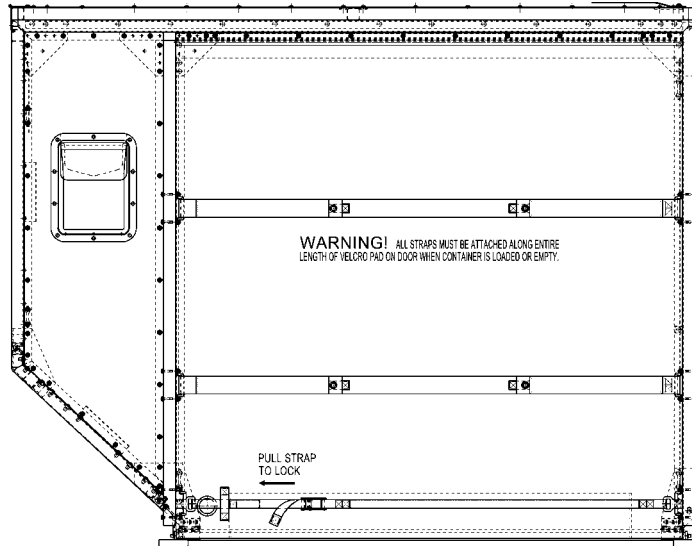

- 5. Dimensions : Base = 60,4" x 61,5" (1534 x 1562 mm)
Height = 61,2" (1555 mm)
- 6. Tare weight : Approx. 94 kg / 207 lb
- 7. Maximum Gross Weight : 1588 kg / 3500 lb
- 8. Sheet alloy / thickness : Panels and roof 6082-T6 / 0.7 mm
Slope 6082-T6 / 1.2 mm
Base 7021-T6 / 2.7 mm
- 9. Extrusion alloy : Base 7003-T6
Structure 7003-T6
- 10. Fasteners : Lockbolts (6.4 mm)
- 11. Stiffeners : 2 in slope panel
1 in roof panel
- 12. Door : Standard door posts
Flexible canvas door
2 velcro straps
1 strap with cam buckle
- 13. Gussets : In each corner
- 14. Others : Grasp handles on each corner
Document holder
Manufacturing plate
Tie down points attached along side base edge rails
- 15. Flammability : FAR 25.853
- 16. Certification standard : TSO C90c / NAS3610-2K2C
- 17. Certified by : EASA / FAA
- 18. Driessen p/n : **3-K112**

www.driessen.com

Air Cargo Equipment • Trolleys • Galley Structures
Galley Equipment • First Class Monuments • Crewrests



DRIESSEN

Driessen Europe
De Stek 1,
PO Box 28
1770 AA Wieringerwerf
The Netherlands
Phone +31 227 606 161
Fax +31 227 606 120
Email europe@driessen.com

Driessen USA
3340 C Greens Rd.
Suite 300
Houston, TX 77032
USA
Phone +1 281 590 0300
Fax +1 281 590 0308
Email houston@driessen.com

Driessen Asia Pacific
Asia Pacific Region Sales Office
4 Loyang Crescent
Singapore 508979
Singapore
Phone +65 65 465 486
Fax +65 65 465 487
Email singapore@driessen.com